



“Modeling and Simulation based analytical tools in countermeasures development & support”.

- November 2008



Controlled Goods & Technology Notice

Tactical Engagement Simulation Software (TESS) and any related technology and intellectual property from Tactical Technologies Inc is classified as controlled goods and technology by the Canadian Government.

TESS is classified as “Group 2 Munitions” as defined in Canada’s Export Controlled List in categories 2-21 “software specifically designed for modeling, simulation and evaluation of military weapon systems” and 2-22 “technology required for the development, production and/or use of controlled goods”


As such, it requires appropriate protection and control by those with access to it for any reason and requires formally approved visitor exemptions and export permits.

Presentation Objectives



- Identify the contribution modeling and simulation based analysis & tools provide to effect based countermeasure development and support
 - » Basic research & development in techniques and tactics
 - » Threat system analysis
 - » ECM & ECCM effectiveness test & evaluation,
 - » Hardware-in-the-loop T&E
 - » Real time operator training (radar, EW & pilots)
 - » Operational doctrine development ,
 - » And associated requirements
- common modeling and simulation infrastructure can support these requirements

Countermeasure Development Process

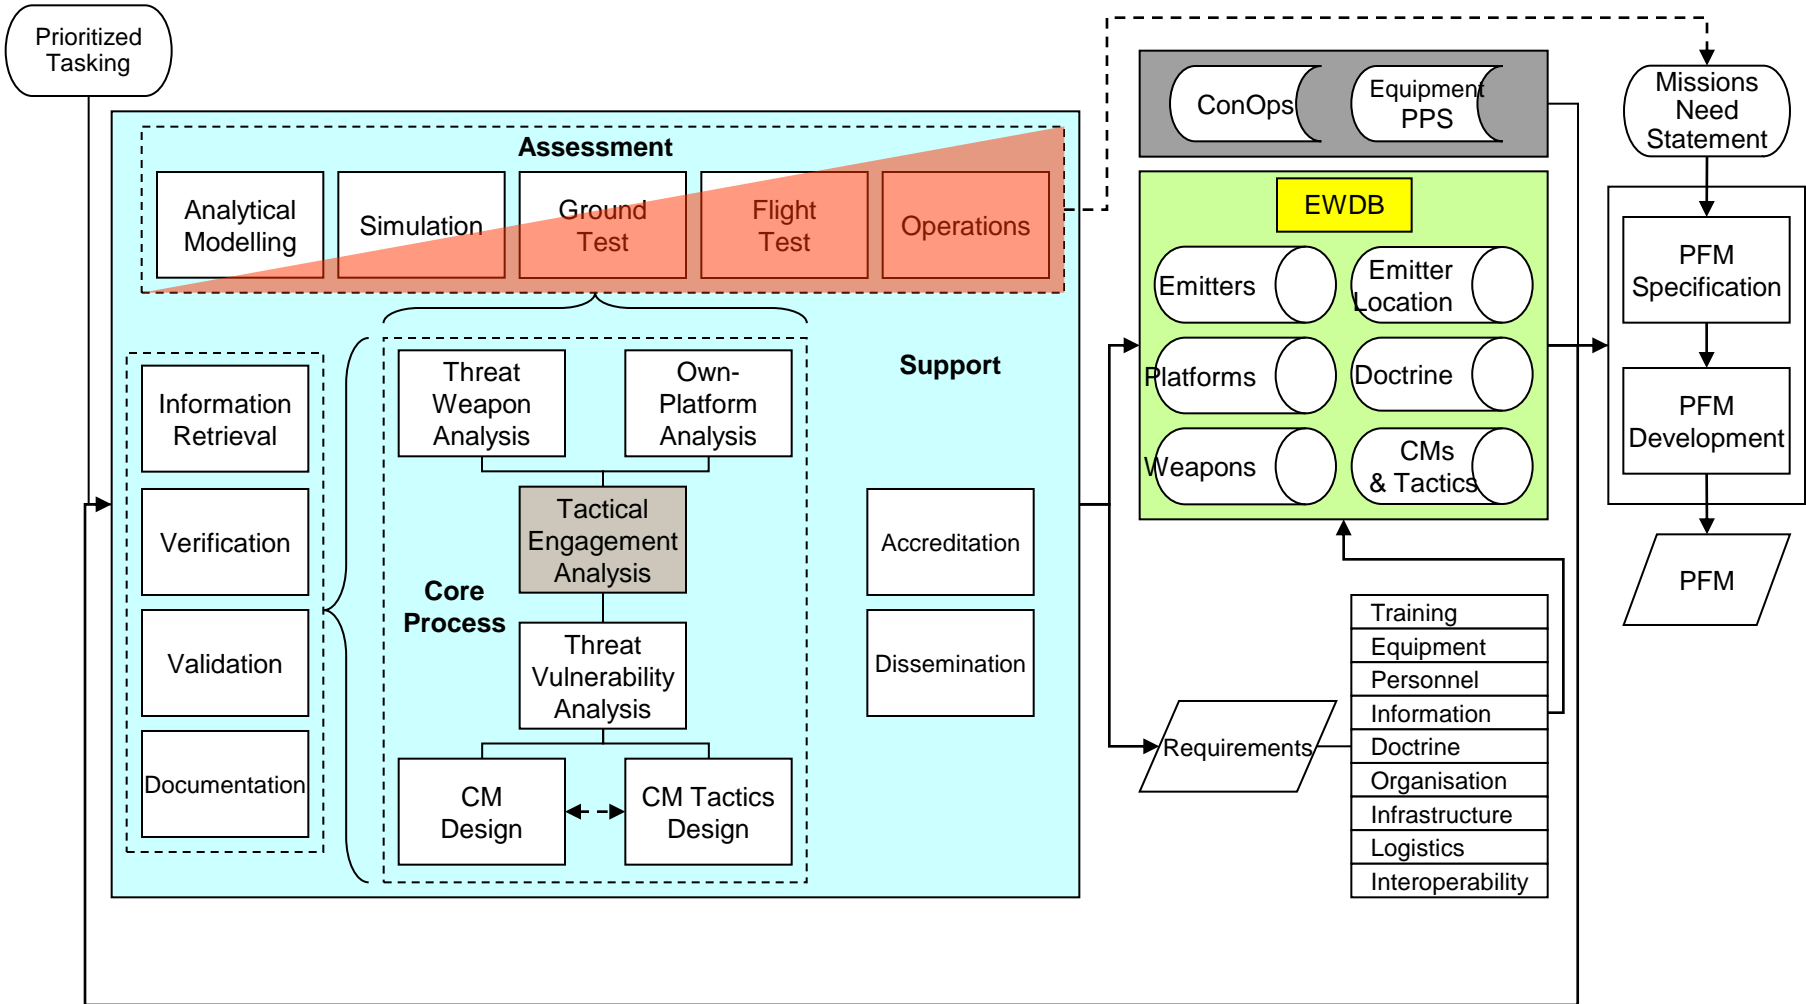

c/o David Tuffnell - MASS Consultants Limited, Lincoln, UK

CM Readiness Level / Maturity Model



CRL 9	Actual CM Tactics qualified e.g. through reliability demonstration in operations	Test, qualification and operation
CRL 8	Actual CM Tactics completed and qualified through operational test and evaluation	
CRL 7	Actual CM (Tactics) prototype demonstrated in an operationally relevant environment	Demonstration, equipment checks
CRL 6	Actual CM validation in laboratory environment	
CRL 5	Actual CM (Tactics) prototype demonstrated in a laboratory environment	Research to prove feasibility
CRL 4	Generic CM validation in laboratory environment	
CRL 3	Analytical & experimental CM critical function and characteristic proof-of-concept	Modeling & Simulation
CRL 2	CM concept and application formulated	
CRL 1	Basic CM principles observed & reported	Basic research

Flight Test

Ground Test

Modeling & Simulation

c/o David Tuffnell - MASS Consultants Limited, Lincoln, UK



General M&S Requirements



- Countermeasure Effectiveness
 - is measured in miss distance and probability of kill at end-game
 - this requires the computation of a complete closed-loop dynamic engagement &
 - use of high fidelity weapon system models
 - with dynamic & non-linear system elements
 - Batch run and Monte Carlo analysis
- Real time HWIL test & evaluation - closed-loop
 - simulate engagements with T&E hardware & system under test
 - provide comparative analysis between the virtual and hardware loops for verification
- Built in test report & audit tools
- Real time interactive operator training
- Ideally the same system models and software supports all these applications




Pragmatic Requirements



- Integrated engagement simulation = turn-key engagement
- Standard PC's with Windows®
- MATLAB® and Simulink® infrastructure
 - Advanced system modeling & simulation language
 - » Open, Hierarchical Structure
 - » Easy To Program, Validate and Modify...
- Source Code & Source Code Software Description Documents - standard options
- Classified data is entered by the user
- Users can easily modify system models to add capabilities
- Totally open, modular, extensible and supported
- COTS Product – support & continues to evolve
- Will evolve with your requirements


The Engagement Problem

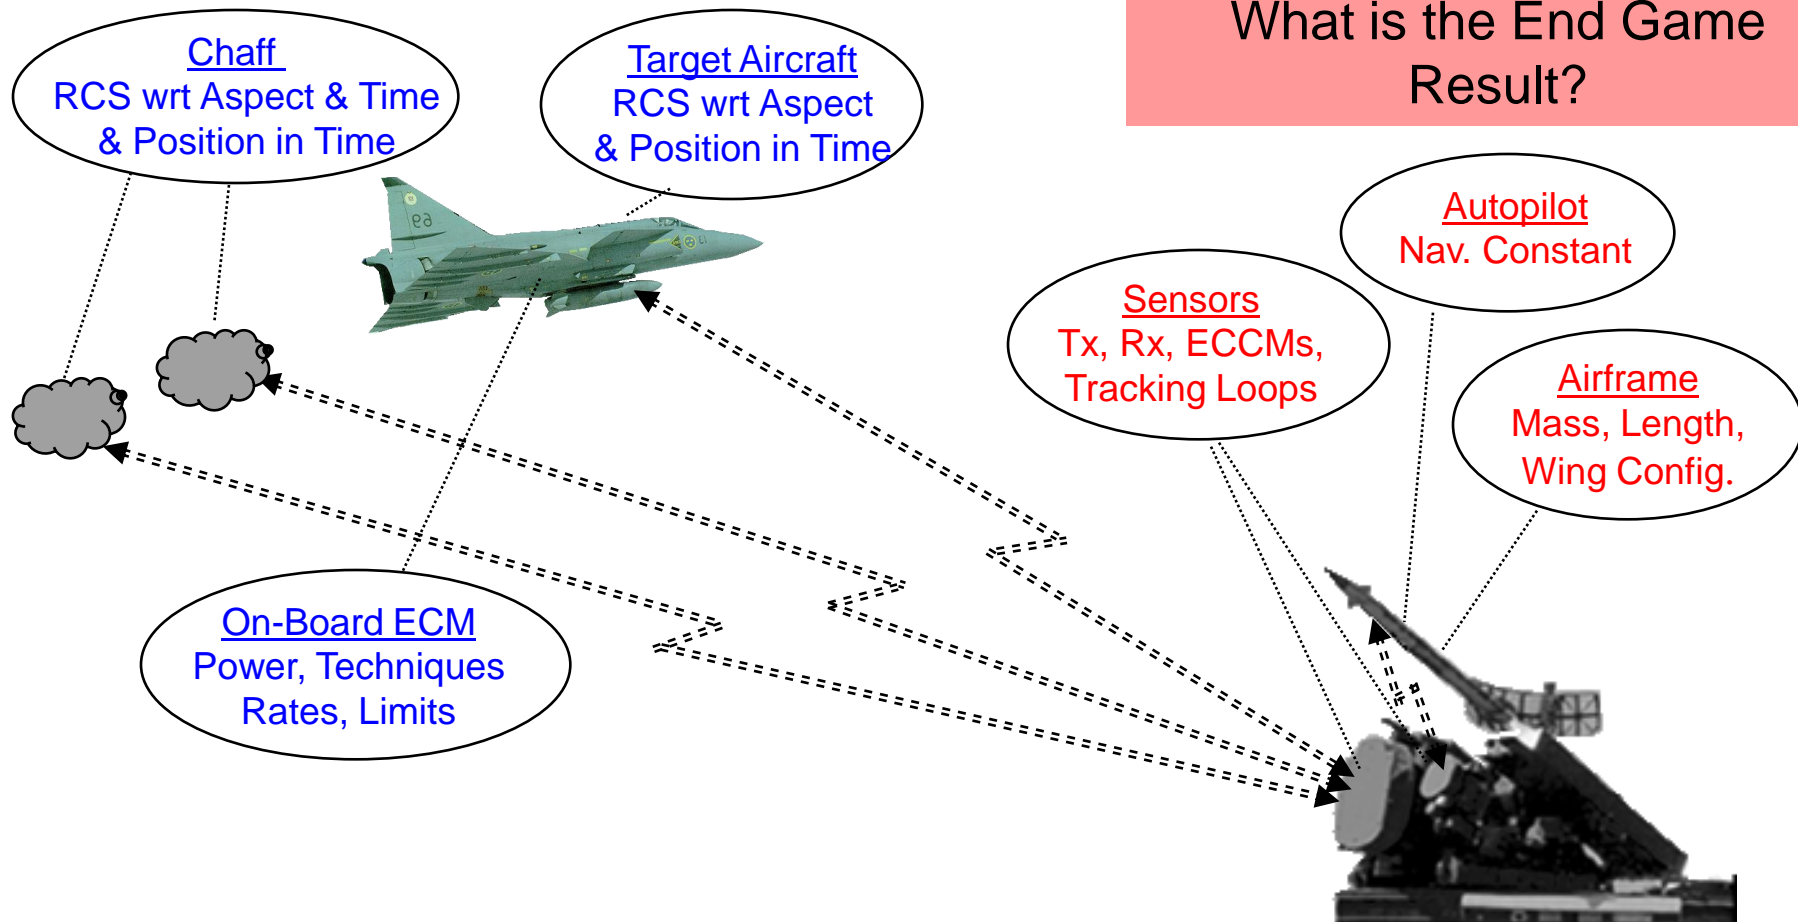

Integrated Engagement Simulation (IES)



Integrated Engagement Simulation

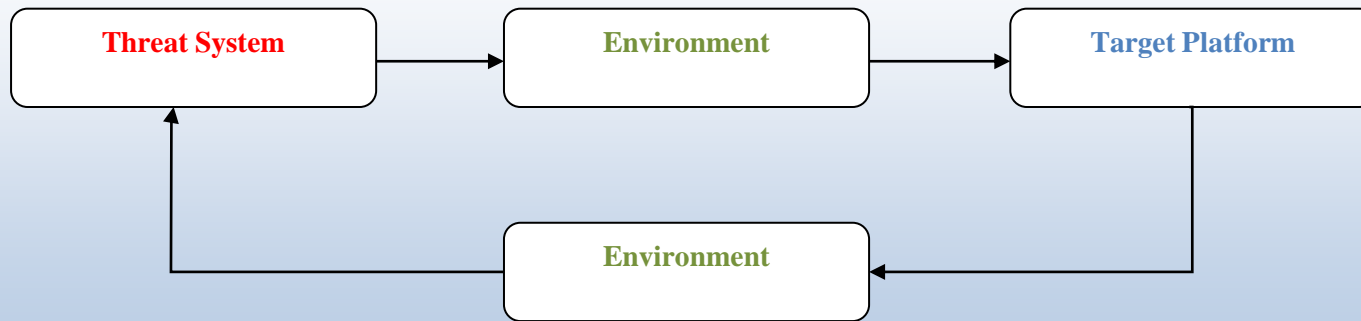

- Threat System = Sensor, Target Tracking, Guidance, Auto-Pilot, Airframe etc...
- Target Platform = Signature, Maneuvers & Self Protection capabilities
- Environment Systems = effects caused between the threat & target related to engagement geometry, signal propagation, background noise, multipath, clutter etc.

= an integrated engagement simulation system-of-systems

from Detection/Launch-to-End Game

Common Infrastructure



Training in
countermeasure
concepts & physics

Training Radar &
EW with operators-
in-the-loop

TESS

Developing &
evaluating
countermeasures

System test &
evaluation using
hardware-in-the-loop



Standard COTS TESS



Is a family of integrated engagement simulation (IES) based analytical tools covering various weapon system classes

It supports IR & radar guided weapons in surface-to-air, air-to-air , anti-ship, and anti-tank engagements

Self-contained, turn-key COTS products include all the primary systems involved in a tactical engagement


Analytical features built-in:

- measures of effectiveness
- threat/target/ECM library database
- system scopes
- test reports and
- support for deterministic and Monte Carlo analysis (batch runner)

Open... to be customized, reconfigured, integrated with other system models, HWIL and training systems, and

TESS can run slower, faster or in real-time.

TESS IES Overview (scripted)

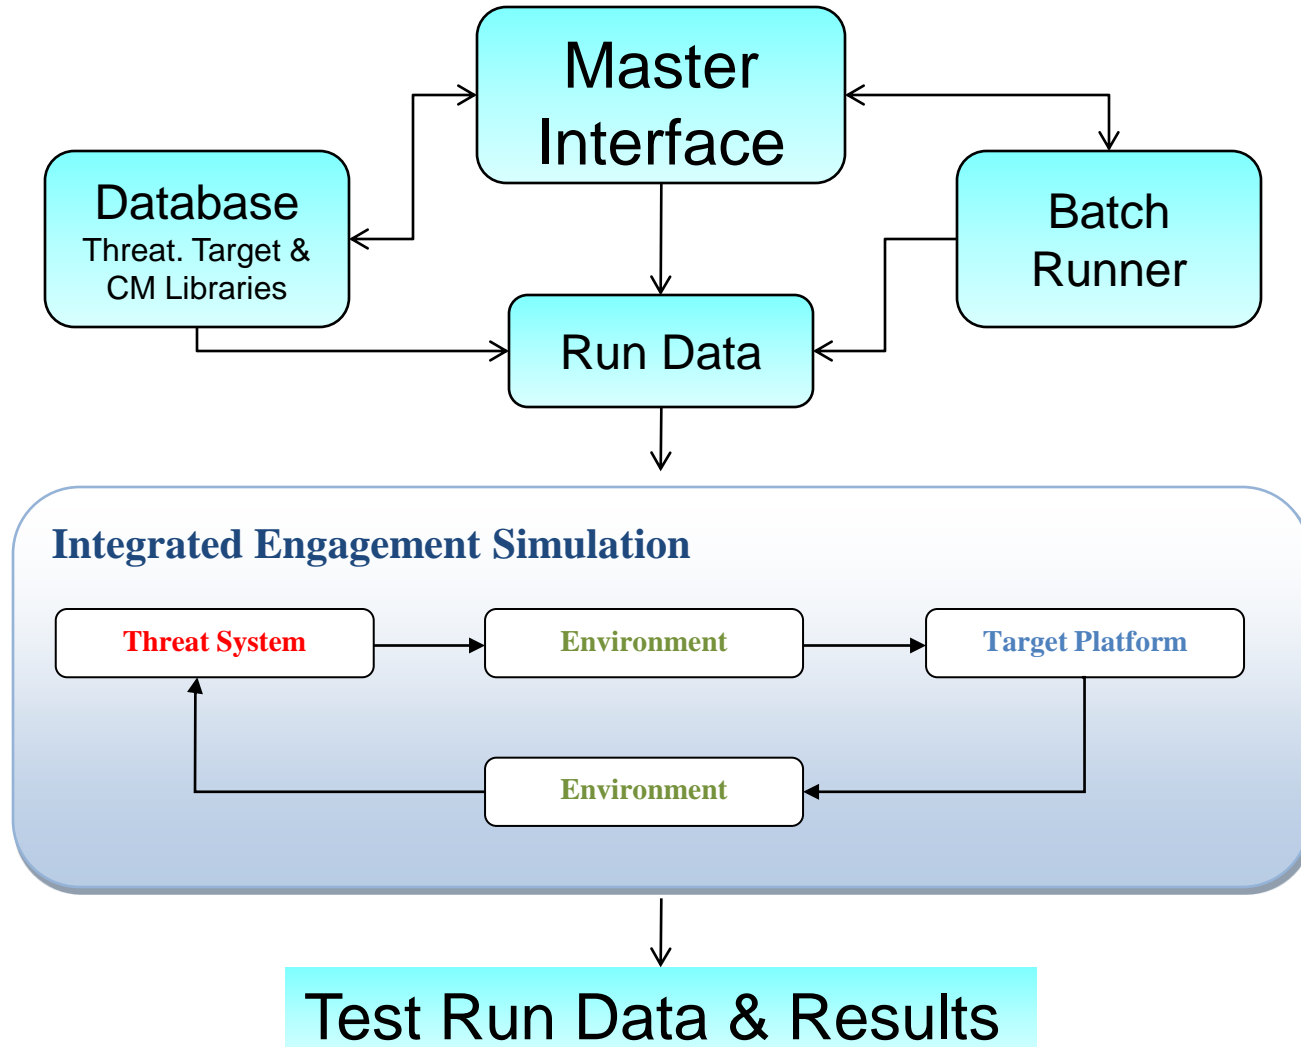



Engagement Menu

AAM SAM

Engagement ID: mica_d001 Save Save As
TESS Model: AAMIR Delete Reports
Date | Time: 1/3/2006 4:15:08 PM Batch Runner

Example Infrared Air-to-Air Missile Engagement.

Simulation Settings

Simulation Mode = Semi Compiled
 Batch Running Mode Effectiveness Measures
 Enable Virtual Reality Polar Plot - Batch Results
 Enable Quick Setup Engagement Plot Settings
Quick Setup ID: 1

Weather and Ground Conditions

Environment ID: clear air
Terrain Type: Flatland

Threat System Settings

Threat ID: MICA
Number of Threat Platforms = 1

Missile 1 Missile 2

Launch Platform Initial Conditions	Launch Platform Engagement Maneuvers
Azimuth = 0 deg	Threat Maneuvers
Range = 4000 m	
Altitude = 1000 m	
Initial Azimuth Heading = 180 deg	
Initial Elevation Heading = 0 deg	
Launch Platform Velocity = 250 m/s	
Launch Time = 0.1 s	

At Seeker Turn-On

Seeker Mode = Track Kill Distance = 5 m


Target Aircraft Settings

Aircraft ID: F-16a

Initial Conditions	Engagement Maneuvers
Altitude = 1000 m	Target Aircraft Maneuvers
Initial Azimuth Heading = -160 deg	
Initial Elevation Heading = 0 deg	
Target Aircraft Velocity = 200 m/s	

Enable Flare Flare Tactics ID: 1
 Enable Decoys Decoy Tactics ID: off
 Enable Jammer Jammer Program ID: MICA-P001

Miss Distance vs IR Flares

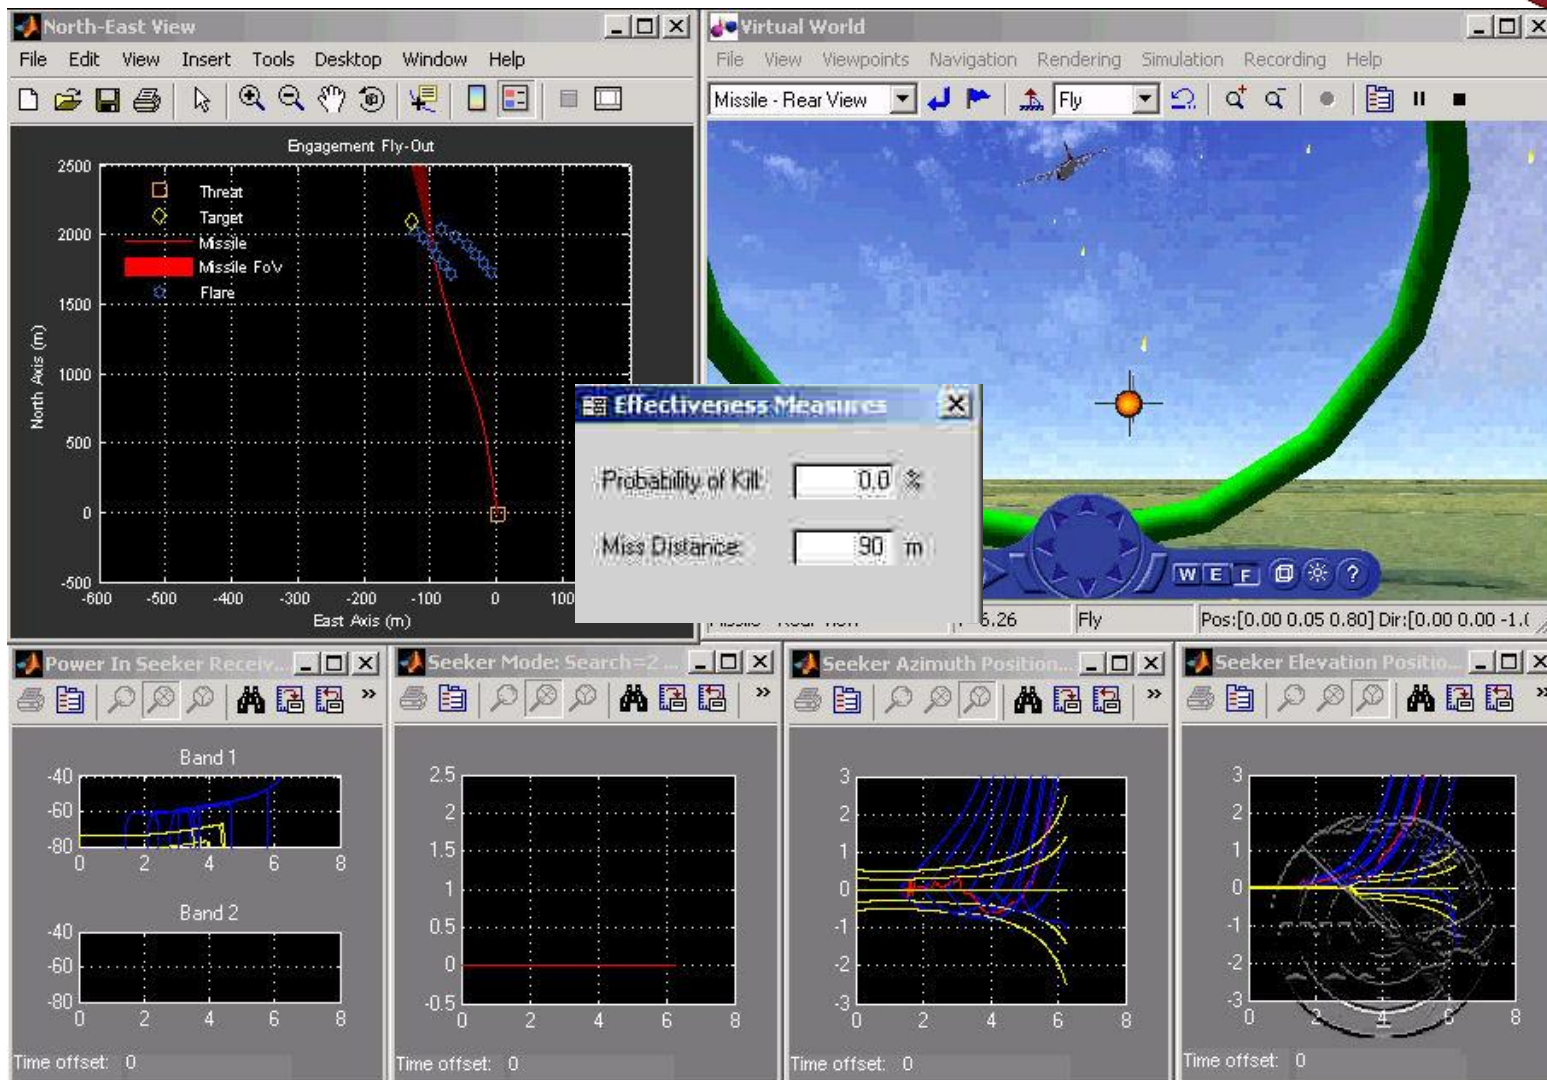



TESS Batch Runner

File Settings Output Help

Project ID: mica_d001 Estimated time remaining: 1 hours 36 minutes 50 seconds

Runs: 111

Output File: mica_d001.txt

System Models / Parameters

Variables

Create New Variable

Name:	Start:	End:	Increment By:	Runs to Increment:
azlaunch	0	360	10	3

Random Variables

Create New Variable

Name:	Lower:	Upper:
lrange1	4000	5000
airvel	180	220
air_el	-2	2
z	1000	1200

Output Data

Output: Add


miss1
prob_kill1
prob_surv1
prob_kill_cum
prob_surv_cum

Running [Progress Bar] Stop

#Run: 28 24 percent complete.
azlaunch: 90 lrange1: 4628.677 airvel: 181.304 air_el: -0.895 z: 1123.211

Running TESS Batch Runner

Polar Plot of the Probability Miss Exceeds Threshold

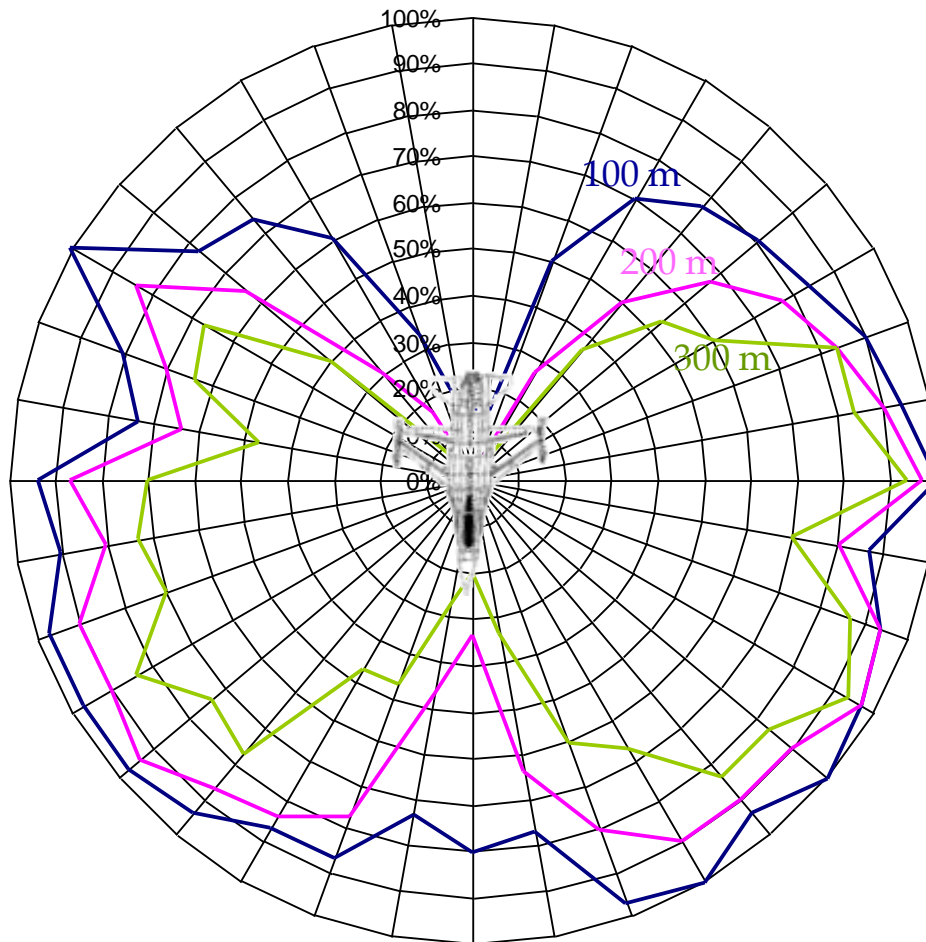

Fixed Parameters

A/C IR Rad Int
800 w/str

Flare IR Rad Int
4000 w/str

Flare Deployment
6 flares
0.5 sec spacing

Random Parameters (Monte Carlo Selection)

Launch Distance
• 2000 to 4000 m

Missile Velocity
• 600 to 1000 m/s

Batch Run Data File



SIMULATION GENERAL INFO

```
// Matlab File Name
saamir.mdl
// Matlab Block: Background
// Parameters:
Spectral Radiance Weighting Factor [Band 1 Band 2]: [1 1]
// Matlab Block: DIRCM Environment
// Parameters:
Atmospheric Attenuation Weighting Factor [Band 1 Band 2]: [1 1]
// Matlab Block: Seeker 1 Environment
// Parameters:
Atmospheric Attenuation Weighting Factor [Band 1 Band 2]: [1 1]
// Matlab Block: Seeker 2 Environment
// Parameters:
Atmospheric Attenuation Weighting Factor [Band 1 Band 2]: [1 1]
// Matlab Block: Simulation Control
// Parameters:
Select Simulator:: Passive Infrared Air-To-Air Missile
Number of Threat Platforms:: 1
```

TARGET INFO

```
// Matlab Block: Target Platform/Aircraft
// Parameters:
Initial Platform Position: Altitude (m): z
Initial Platform Heading and Velocity: Azimuth (deg): -160
Initial Platform Heading and Velocity: Elevation (deg): air_el
Initial Platform Heading and Velocity: Velocity (m/s): airvel
Platform Type: [Fixed Wing (1) or Rotary Wing (2)]: 1
Platform Dimensions: Radius (m): 3.5
Platform Dimensions: Length (m): 14
Platform Dimensions: Vulnearable Area (m^2): 50
```

// Matlab Block: Target Platform/Flares

```
// Parameters:
Number of Flares: 12
Ejected Mass (g): 350
Reference Area (m^2): 0.0013
Drag Coefficient: 1
Flare Type: [Standard (1) or Propelled (2)]: 1
Mass of Flammable Material (g): 350
Nozzle Area (m^2): 0.0006
Specific Impulse (s): 10
```

THREAT 1 INFO

```
// Matlab Block: Threat System 1/Seeker Receiver
// Parameters:
Select Parameters Type: Search Mode Parameters
Seeker Mode at Turn-On: Track
Gimbal Limits (deg): Azimuth, Elevation : [45 45]
Select Seeker Search Pattern : Helical Scan
Helical Scan Period (s): 2
Frequency of Rotating Optics (Hz): Element 1, Element 2: [15 29]
Sensor Aperture Area (cm^2), Fields Of View (deg): Instantaneous, Total: [7 1.5 15]
Detectivity (Hz^(1/2)/W): Band1, Band2: [1E+12 5E+11]
Select Number of Bands: 2
```

// Matlab Block: Threat System 1/Airframe

```
// Parameters:
Airframe Modeling Approach:: Aerodynamic Coefficients
Subsystem Parameters:: Propulsion
Initial Missile Mass (kg): 64
Propellant Mass (kg): 25
Burn Time (s): 3
```


// Matlab Block: Threat System 1/Threat Platform

```
// Parameters:
Initial Position: [Azimuth (deg), Range (m), Altitude (m)]: [azlaunch lrange1 1000]
Velocity (m/s), Initial Orientation: [Azimuth (deg), Elevation (deg)]: [250 180 0]
Turn Times (s): 1, 2, 3, 4: [2 5 10 12]
Lateral Accelerations (+/- g): 1, 2, 3, 4: [3 3 -3 0]
Normal Accelerations (+/- g): 1, 2, 3, 4: [0 0 0 0]
Enable Missile: on
Missile Assignment: [Lead Angle (deg), Super Elevation (deg)]: [0 0]
Missile Launch Time (s): 0.1
```


// Output Data 111

```
Run
Number;azlaunch;lrange1;airvel;air_el;z;miss1;prob_kill1;prob_surv1;prob_kill_cum;prob_surv_cum;AO
A1;AOA2;
1;0;4029.945;202.38;1.014;1052.212;90.5597664361346;0;100;0;100;160;160;
2;0;4801.886;193.624;-0.522;1157.117;94.0531625685274;0;100;0;100;160;160;
3;0;4741.312;197.426;0.377;1166.2;99.3212585436438;0;100;0;100;160;160;
4;10;4676.881;206.222;-1.581;1007.829;104.708869501736;0;100;0;100;170;170;
5;10;4190.03;215.865;-0.84;1001.622;79.0387019873123;0;100;0;100;170;170;
6;10;4536.357;215.058;0.176;1182.964;78.9514999945641;0;100;0;100;170;170;
```

Integrating HWIL to TESS

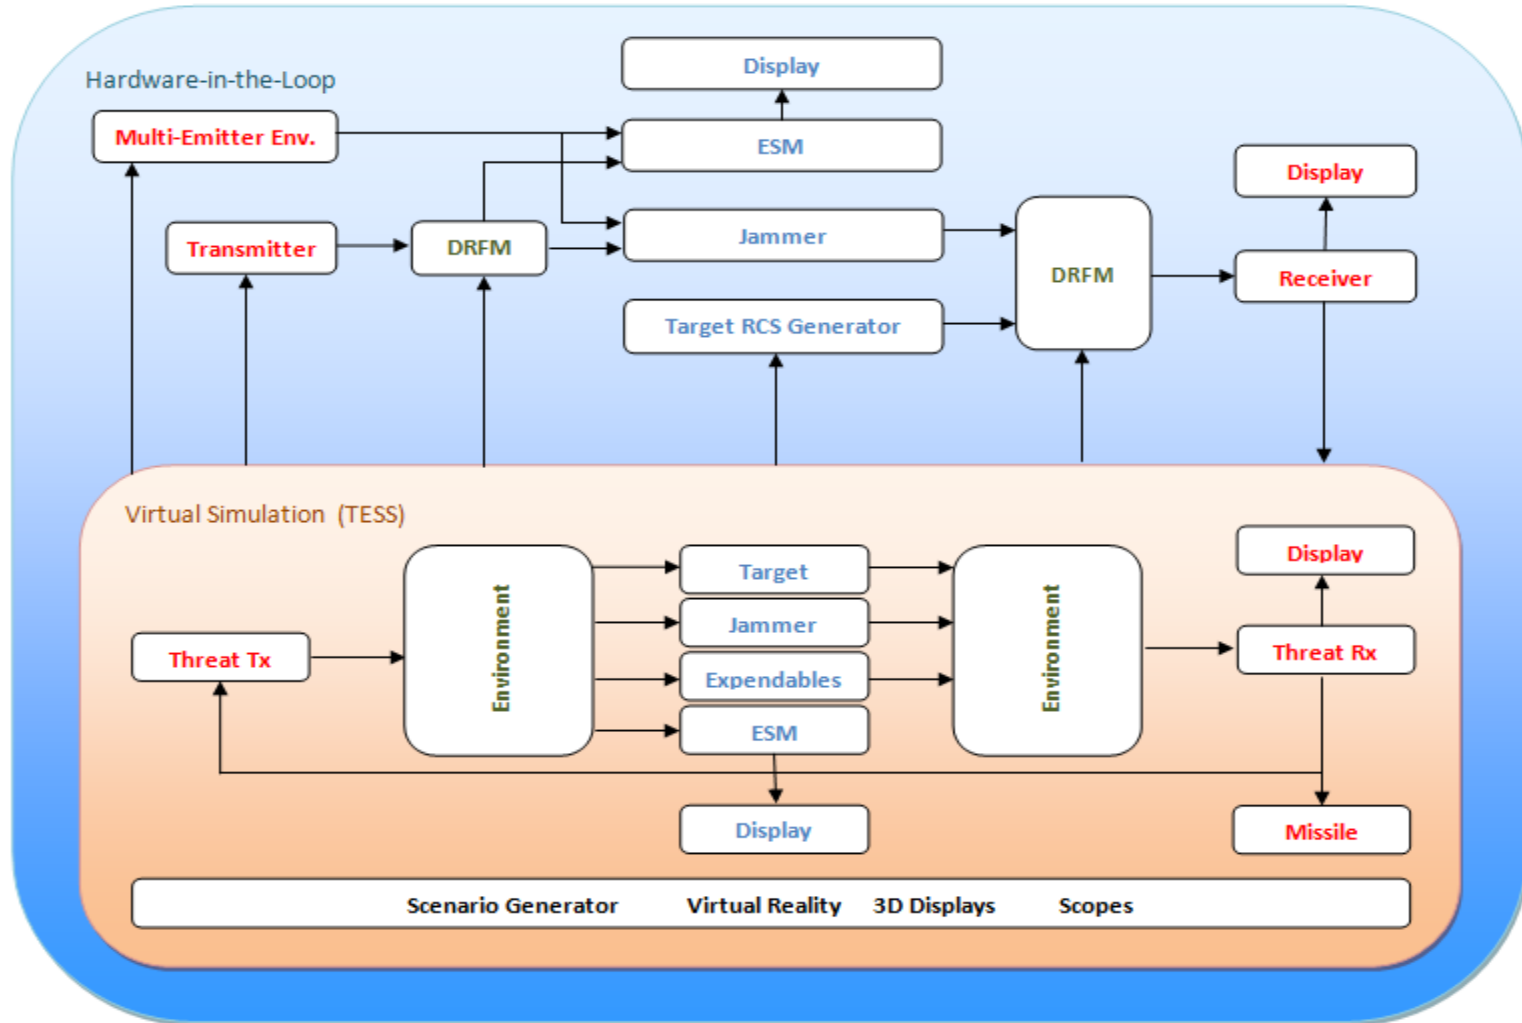

Closing the Virtual & HW loops

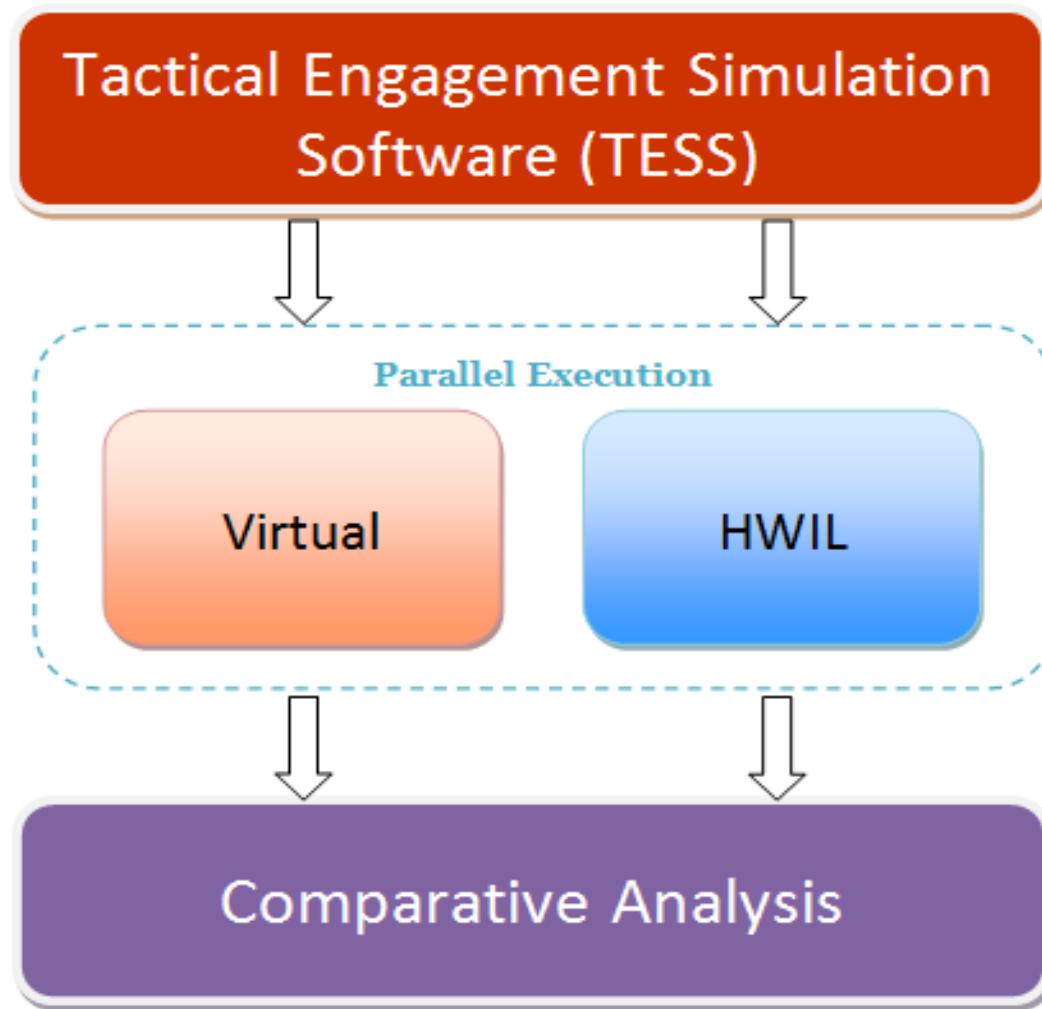

Surface Threat Electronic Warfare System (STEWS)




Used by many NATO aircraft for countermeasures training at CFB Cold Lake – Maple Flag

- 5 high power threat emitters emulate SAM & AAA radars
- Command and Control Center controls engagements
- Multiple aircraft can be handled on the range simultaneously
- Radar and ACMI pods provide position and event data
- TESS is integrated into the ground system to provide
 - Virtual SAM and AAA engagements (up to 7 from 5 sites)
 - Scoring of each engagement in real time with missile miss distance and probability of survival
 - Post mission reports and engagement playback capability for pilot debriefing



STEWS

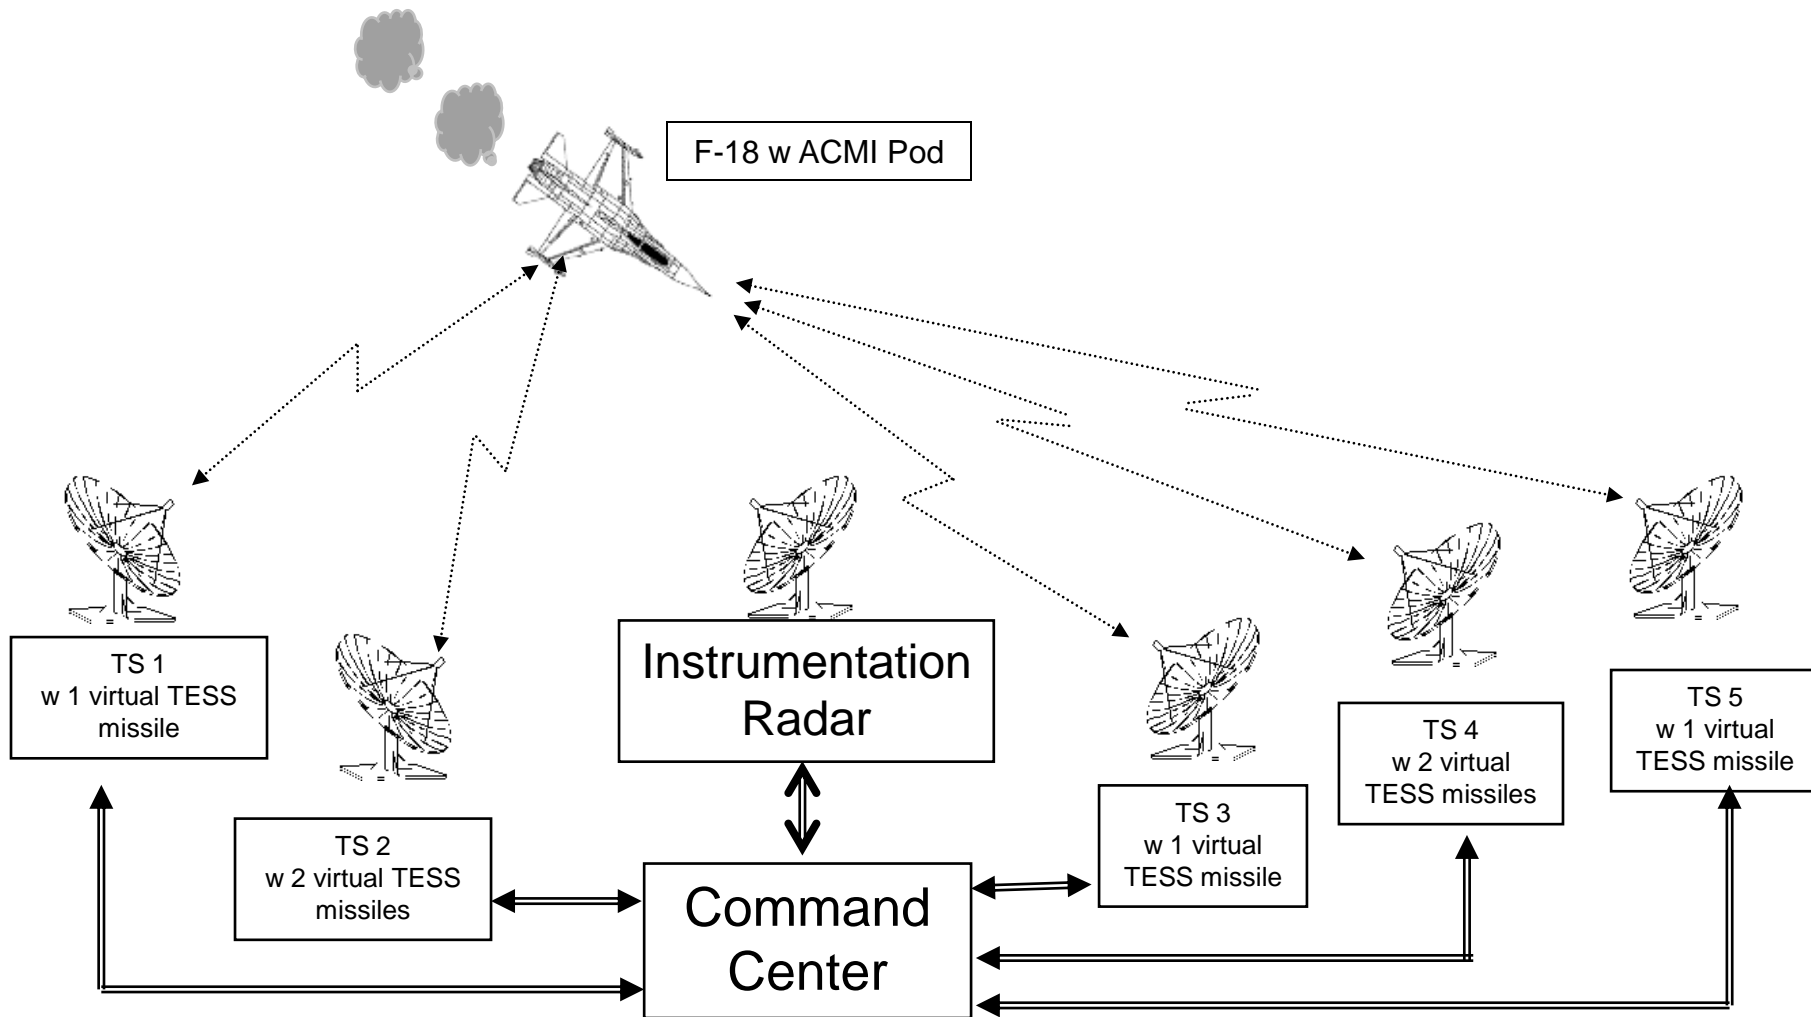

STEW'S Debriefing Reports



TWSS ENGAGEMENT EVALUATION REPORT











Mission: Engagement: Date: Time:
 Pilot's Name: Call Sign: Aircraft Tail Number:

Engagement Duration: seconds Remote Emitter Identifier:
 Chaff Deployed: Jammer On:
 Probability of Kill: % Estimated Miss Distance: meters

TWSS SCOPE EVALUATION REPORT

Mission: Engagement: Date: Time:
 Pilot's Name: Call Sign: Aircraft Tail Number:

Engagement Duration: seconds Remote Emitter Identifier:
 Chaff Deployed: Jammer On:
 Probability of Kill: % Estimated Miss Distance: meters

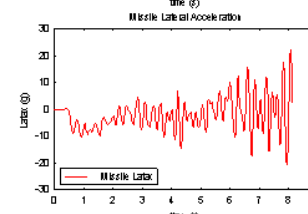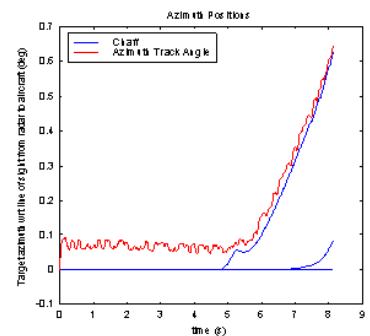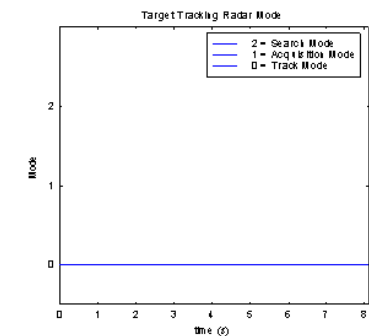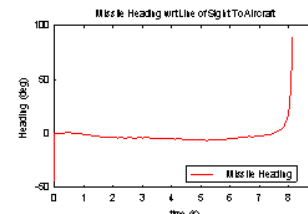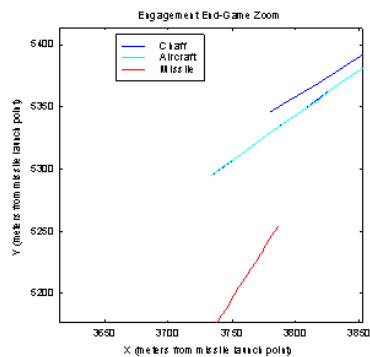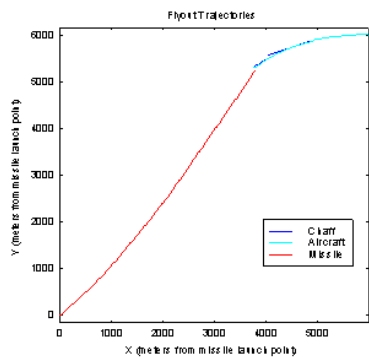



Summary



Modeling and simulation can make a substantial contribution to indigenous countermeasure knowledge and development capability

An infrastructure based on an integrated engagement simulation makes this easier to validate and evolve

A common open, modular and COTS modeling and simulation infrastructure should be considered to minimize cost, lower risk, and leave your options open - an advanced baseline for evolving requirements with common models and same parameters

Requirements can range from slower-than-real-time, faster-than-real-time, or real-time simulations

- Virtual engagement simulations to support countermeasure analysis
- HWIL engagement simulations – comparative analysis
- Custom hard and soft kill engagement simulations
- Custom simulation development - building blocks
- Test range & other real-time operator/platform in the loop training
- Air, sea and land EW/ECM/ECCM